## BPF Series Mulcher



The European designed BULLY BPF Series Mulchers are designed for tractors 60 to 100hp and have a tower that hydraulically side shifts.


Like other BULLY Mulchers, a series of removable, height adjustable mulching rakes hold larger prunings (up to  $\emptyset$  70mm) in the cutting chamber for mulching in vineyards and orchards.

Additionally, the rear of the BPF Mulcher deck can be opened to top pasture or when the operator needs to clear the chamber. This function is beneficial when cutting high volumes of material allowing it to be discharged efficiently, without sacrificing speed.

Complete with a double skinned deck, side shift, a height adjustable rear roller and hammer blades, this mulcher will produce a high–quality finish.





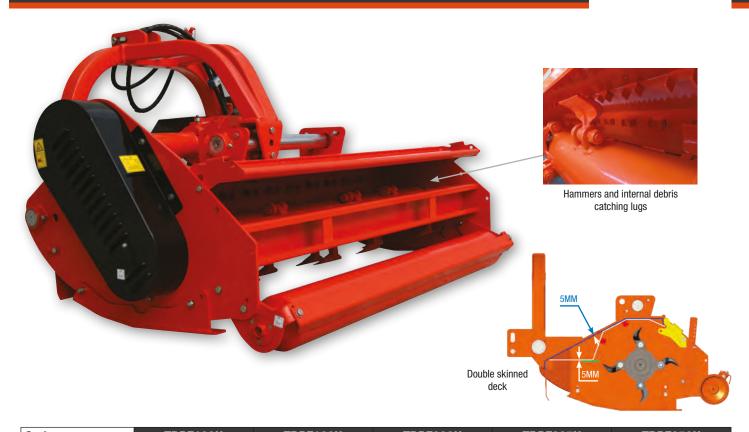

Code	TBPF160H	TBPF180H	TBPF200H	TBPF225H	TBPF250H
Size reference	1.6m   5'4"   64"	1.8m   6'0"   72"	2.0m   6'8"   80"	2.25m   7'6"   90"	2.5m   8'2"   98"
Side transmission	Belt drive				
Belts	Four (4) XPB type				
Gearbox	100hp, 540rpm with freewheel				
PT0 shaft/clutch	Series 6				
Skids	Adjustable, two (2) positions				
Rear roller	Ø 165mm, height adjustable				
Finish	Powder coated				
Rotor swing dia. (mm)	410				
Rotor diameter (mm)	170				
Rotor speed (rpm)	2146				
Type of blade	Hammer				
No. of hammers	16		20	20	24
Tower position/offset	Hyd. side shift (400mm)	Hyd. side shift (337mm)	Hyd. side shift (437mm)	Hyd. side shift (467mm)	
	873 727 mm 11127 mm mm	910 890 mm 1227 mm	1010 990 mm 990 573 1426 mm	1140 1110 mm m m m m m m m m m m m m m m m	1140 1360 mm 1827 mm
Linkage	Category 2				
Guarding	Standard with CE compliant, individual metal flap guarding				
Overall width (mm)	1800	2000	2200	2450	2700
Working width (mm)	1580	1780	1980	2230	2480
Cutting height (mm)	20 - 75				
Tractor range (hp)	50 - 100	60 - 100	70 - 100	80 - 100	85 - 100
Weight (kg)	640	680	735	800	865

## **Parts**

**17067** Bu BP

Bully BPF Series hammer (each) BPF Series belt set (4 belts)